



# Range hood Halogen Light Replacement



**1.** Using a thin flat object such as a Small screwdriver , spatula or a metal ruler as shown above , lever the metal centre ring away from the outer ring (lamp assembly).  
**IMPORTANT:** While levering the middle ring away from the lamp assembly remember to cup your hand directly beneath it in order to catch both the centre ring and circular glass preventing them from falling on the surface below.

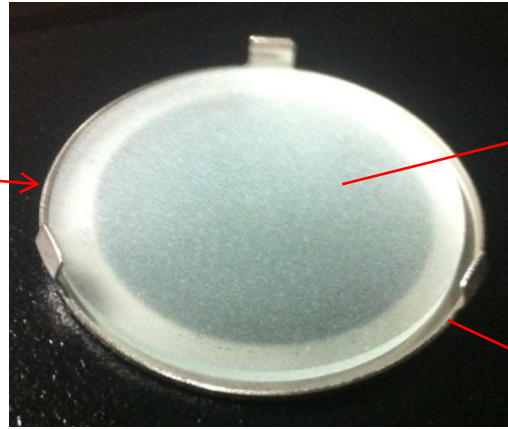

**2.** After the glass and centre ring are removed the globe will be visible, to remove the globe grip it with your thumb and forefinger, then gently wiggle the globe while pulling it away from the globe holder terminals

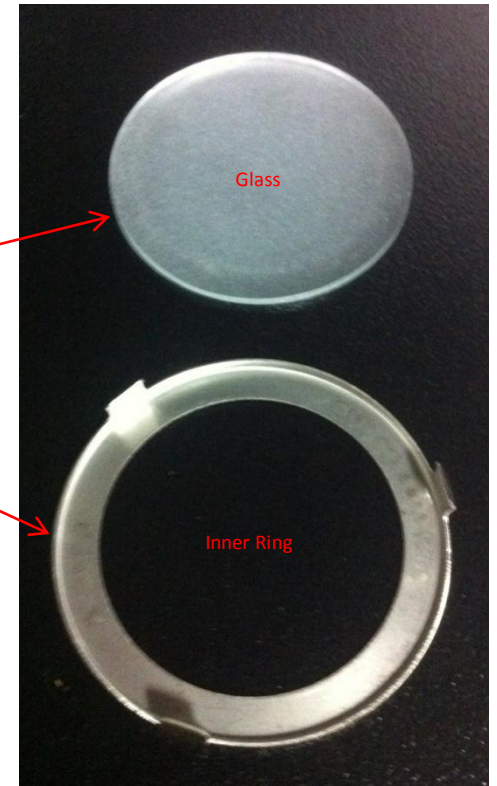

**3.** When fitting the new 20W halogen globe into position follow the removal instructions backwards.  
**IMPORTANT TIP:** Do not touch the new globe with your fingertips as it will shorten the life of the globe, try using the wrapper provided with the globe packaging, it is the most common method used.

